




**Eyesky Energy**

# Stackable solar energy storage system

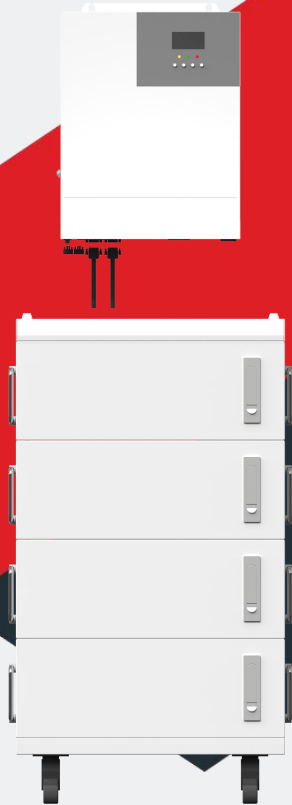

**Shenzhen Eyesky New Energy Technology Co.,Ltd**

E-mail: [vicky@tianyankj.com](mailto:vicky@tianyankj.com) whatsapp&Mobile:86-13691890623

website:[www.eyeskyenergy.com](http://www.eyeskyenergy.com)

# All-in-one solar charge inverter

TY-LH4840K /TY-LH4850K




## Performance characteristics

- Full digital voltage and current double closed loop control, advanced SPWM technology, output of pure sine wave.
- Two output modes: mains bypass and inverter output; uninterrupted power supply.
- Available in 4 charging modes: Only Solar, Mains Priority, Solar Priority and Mains & Solar hybrid charging.
- Advanced MPPT technology with an efficiency of 99.9%.
- With the charging requirement (voltage, current, mode) settings, and suitable for various types of energystorage batteries.
- ON/OFF rocker switch for AC output control.
- Power saving mode available to reduce no-load loss.
- Intelligent variable speed fan to efficiently dissipate heat and extend system life.
- Lithium battery activation design, allowing access of lead-acid battery and lithium battery.
- 360° all-round protection with a number of protection functions. Such as overload, short circuit and overcurrent.
- Supply of a variety of user-friendly communication modules, such as Rs485 (GPRS,WIFI), CAN, USB etc., and suitable for computer, mobile phones, Internet monitoring as well as remote operations.


## Application scenarios



## Product connection diagram

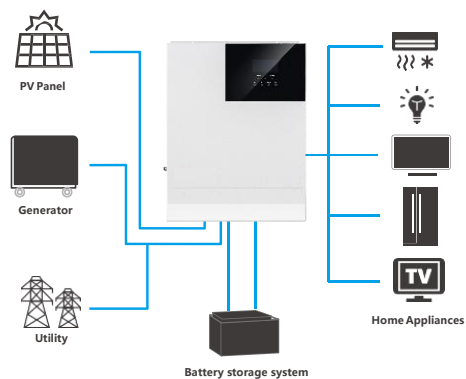

## Product characteristics



①	Overload protector	⑨	Dry contact port
②	ON/OFF rocker switch	⑩	Cooling fan
③	AC input port	⑪	Battery port
④	AC output port	⑫	Cooling fan
⑤	Grounding screw hold	⑬	PV port
⑥	RS485-2 communication port	⑭	Touch button
⑦	USB communication port	⑮	Indicator
⑧	RS485-1 communication port	⑯	LCD screen

## Parameters

Models	TY-LH4840K	TY-LH4850K
<b>AC mode</b>		
Rated input voltage	220/230Vac	
Input voltage range	(170Vac~280Vac) ±2%/(90Vac-280Vac)±2%	
Frequency	50Hz/ 60Hz (Auto detection)	
Frequency Range	47±0.3Hz ~ 55±0.3Hz (50Hz)/57±0.3Hz ~ 65±0.3Hz (60Hz);	
Overload/short circuit protection	Circuit breaker	
Efficiency	>95%	
Conversion time (bypass and inverter)	10ms (typical)	
AC reverse protection	Available	
Maximum bypass overload current	40A	
<b>Inverter mode</b>		
Output voltage waveform	Pure sine wave	
Rated output power (VA)	4000	5000
Rated output power (W)	4000	5000
Power factor	1	
Rated output voltage (Vac)	230Vac	
Output voltage error	±5%	
Output frequency range (Hz)	50Hz ± 0.3Hz/60Hz ± 0.3Hz	
Maximum Efficiency	>92%	
Overload protection	(102% < load < 125%) ±10%: report error and turn off the output after 5 minutes; (125% < load < 150%) ±10%: report error and turn off the output after 10 seconds; Load > 150% ±10%: report error and turn off the output after 5 seconds;	
Peak power	8000VA	10000VA
Loaded motor capability	3HP	4HP
Output short circuit protection	Circuit breaker	
Bypass breaker specifications	40A	
Rated battery input voltage	48V (Minimum starting voltage 44V)	
Battery voltage range	Undervoltage alarm/shutdown voltage/overvoltage alarm /overvoltage recovery... settable on LCD screen)	
Power saving mode	Load ≤50W	
<b>AC charging</b>		
Battery type	Lead acid or lithium battery	
Maximum charge current	60A	
Charge current error	± 5A <sub>dc</sub>	
Charge voltage range	40V <sub>dc</sub> ~58V <sub>dc</sub>	
Short circuit protection	Circuit breaker and blown fuse	
Circuit breaker specifications	40A	
Overcharge protection	Alarm and turn off charging after 1 minute	
<b>PV charging</b>		
Maximum PV open circuit voltage	145V <sub>dc</sub>	
PV operating voltage range	60-145V <sub>dc</sub>	
MPPT voltage range	60-115V <sub>dc</sub>	
Battery voltage range	40-60V <sub>dc</sub>	
Maximum output power	4200W	4200W
PV charging current range (can be set)	0-80A	0-80A
Charging short circuit protection	Blown fuse	
Wiring protection	Reverse polarity protection	
<b>Certified specifications</b>		
Certification	CE(EN62109-1)	
EMC certification level	EN61000_C2	
Operating temperature range	-15°C to 55°C	
Storage temperature range	-25°C ~ 60°C	
Humidity range	5% to 95% (Conformal coating protection)	
Noise	≤60dB	
Heat dissipation	Forced air cooling, variable speed of fan	
Communication interface	USB/RS485(WiFi/GPRS)/Dry node control	
Size (L*W*D)	426*322*124mm	
Weight (kg)	10.8	

# Stackable energy storage system

TY-CN5K-H1 /TY-CN5K-H2/TY-CN5K-H3/TY-CN5K-H4/TY-CN5K-H5/TY-CN5K-H6




## Performance characteristics

- Compatible with multi-brand storage inverters
- Remote fault diagnosis
- Support parallel expansion, up to 6 parallel
- One-key automatic allocation of parallel ID, simple and convenient operation
- Long cycle life (6000 times@80%DOD/25°C/0.5C charge and discharge, 60%EOL)
- Automated PACK production line, stable and reliable production quality
- Floor stacking installation, saving installation time and cost.


## Application scenarios



## Product connection diagram

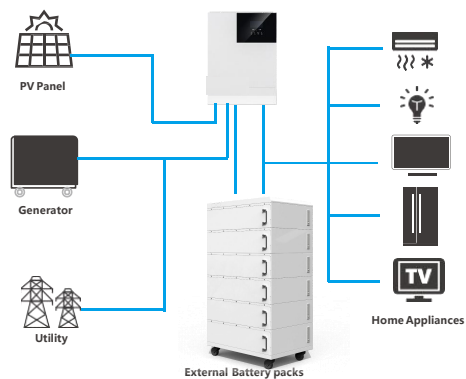

## Product characteristics

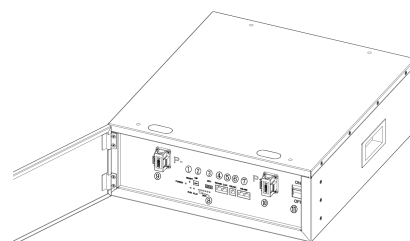

①	RESET	②	DIP
③	DRY	④	RS485
⑤	CAN	⑥	RS232
⑦	RS485	⑧	SOC
⑨	P-	⑩	P+
⑪	ON/OFF		

## Parameters

Model Number	TY-CN5K-H1	TY-CN5K-H2	TY-CN5K-H3	TY-CN5K-H4	TY-CN5K-H5	TY-CN5K-H6
<b>System Basic Parameters</b>						
Number of battery packs	1	2	3	4	5	6
Nominal system voltage	51.2V					
System nominal energy (100% DOD)	5.12kWh	10.24kWh	15.36kWh	20.48kWh	256kWh	30.72kWh
Dimension (mm)	480*550*180	480*550*510	480*550*680	480*550*860	480*550*1040	480*550*1220
Weight (KGS)	52	104	156	208	260	312
Protection level	IP65					
Cooling method	Natural cooling					
<b>Battery module parameters</b>						
Nominal Voltage	51.2Vdc					
Nominal Capacity	100AH					
DOD	<90%					
Nominal Charging Current	100A					
Maximum continuous charging current	105A					
Rated Discharge Current	100A					
Maximum continuous discharge current	105A					
Working temperature	Discharge: -20°C~60°C Charge: 0°C~60°C					
Storage temperature	<25°C 12 months<35°C 6 months<45°C months					
environment humidity	<95%RH (No condensation)					
Altitude conditions	<2500m					
Cycle life	6000times@80%DOD/25°C/0.5Ccharge & discharge,60%EOL					
Report	UN38.3,MSDS					